



LED 照明首選

Top Choice for Designers

2025/2026

PRODUCT CATALOG

光源

Light Source

P01

嵌燈

Recessed Light

P07

球泡

p01



層板燈

p04



一體式嵌燈

p07



MR16

p02



櫥櫃燈

p05



AR111 嵌燈

p10



AR111

p03



MR16 嵌燈

p11



軌道燈
Track Light

P16

合燈
Recessed Downlight

P20

高瓦數嵌燈

p14



MR16 軌道燈

p16



AR70 合燈

p20



超薄嵌燈

p15



軌道燈

p17



MR16 合燈

p21



AR111 軌道燈

p19



AR111 合燈

p23



吸頂燈
Ceiling Light

P25

辦公室燈具
Office lighting

P29

平板燈
Panel Light

P32

吸頂燈

p25




T8 山型工事燈

p29



平板燈

p32




吸頂燈

p26



T8 燈管

p30



吸頂燈

p28



輕鋼架燈

p31



壁燈
Wall Light

P33

調光系統
Dimming system

P34

磁吸軌道燈
Magnetic Track Light

P35

壁燈

p33



調光系列

p34



磁吸軌道燈

p35



磁吸電源

p37



配件

p38





AD-0105M

光源

E240002

功率	3W
電壓	AC100-240Vac
色溫	2700K/5700K
尺寸	Ø35*120mm
材質	鋁柱、清玻
燈頭	E14



適用空間 百貨公司、大賣場、專櫃照明
商業照明、重點照明

節能照明 省電效能較一般普通燈泡 80% 以上
符合健康、節能、環保照明



AD-0203M

大瓦數球泡燈



E020120

功率	25W
電壓	AC100-240Vac
色溫	3000K/5700K
尺寸	Ø95*190mm
燈頭	E27



AD-0204M

大瓦數球泡燈



L230108

功率	25W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	Ø119*185mm
燈頭	E27



AD-0207M

全周光球泡燈

E020608

功率	10W
電壓	AC100-240Vac
色溫	3000K/6500K
尺寸	Ø65*115mm
燈頭	E27



AD-0208M

全周光球泡燈

E020618

功率	13W
電壓	AC100-240Vac
色溫	3000K/6000K
尺寸	Ø70*145mm
燈頭	E27



AD-0301M

MR16 (COB) E27 光源



7-L015010

功率	6W
電壓	AC100-240Vac
色溫	3000K
尺寸	49*60mm
角度	15°、24°、60°
材質	鋁



AD-0302M

MR16 光源



E110259

功率	8 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	49*50mm
角度	35°
材質	鋁塑



AD-0303M

MR16 (COB) 光源

37A-L015001

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	49*51mm
角度	15°、24°、60°
材質	鋁



AD-0304M

MR16 (COB) 光源



7-L015002

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	49*60mm
角度	15°、24°、60°
材質	鋁



AD-0305M

AR70 (COB) 光源

E117002

功率	7W
燈頭	B15
電壓	AC100-240Vac
色溫	3000K/6000K
尺寸	70*64mm
角度	30°
材質	鋁



AD-0306M

MR16 (COB) 調光調色光源

7-D011001

功率	8W
電壓	AC100-240Vac
色溫	2700K~6000K
尺寸	49*54mm
角度	45°
亮度	5~100%



AD-0307M

MR16 (COB) 光源

7-D010205

功率	8W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	49*54mm
角度	45°
材質	鋁



AD-0308M

MR16 (COB) 光源



7-D010208

功率	12 燈
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	50*63mm
角度	24°
材質	鋁



AD-0401M

AR111 光源

7-D130005

功率	7 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø110*42mm
角度	25°
材質	鋁



AD-0402M

AR111 光源

7-D130001

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø110*52mm
角度	25°
材質	鋁



AD-0403M

AR111 光源

7-D130002

功率	12 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø110*42mm
角度	25°
材質	鋁



AD-0404M

AR111 光源

7-D130003

功率	18 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø110*42mm
角度	25°
材質	鋁



AD-0405M

AR111 光源 (散光型)

F-D130101

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø110*35mm
角度	散光
材質	鋁



AD-0406M

AR111 調光調色光源 (散光型)

A-L130117A

功率	10W
電壓	AC100-240Vac
色溫	3000K~6000K
尺寸	Ø110*35mm
角度	散光
亮度	5~100%



AD-0411M

AR111 光源

D133002

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø110*78mm
角度	18°、24°、38°
材質	鋁



AD-0412M

AR111 光源

D133001

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø110*78mm
角度	18°、24°、38°
材質	鋁




AD-0601M

T5 層板燈 (一尺)

B-D080004

功率	5W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	290*33*22mm
材質	散熱塑材




AD-0602M

T5 層板燈 (二尺)

B-D080003

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	565*33*22mm
材質	散熱塑材




AD-0603M

T5 層板燈 (三尺)

B-D080002

功率	14W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	875*33*22mm
材質	散熱塑材




AD-0604M

T5 層板燈 (四尺)

B-D080001

功率	18W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	1175*33*22mm
材質	散熱塑材

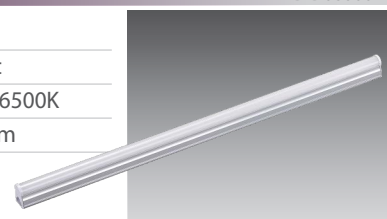

融合優雅的照明設計
FUSED WITH ELEGENCE

LED
照明首選

超薄型設計
櫥櫃燈重點照明首選

低瓦數

小巧
好安裝

高亮度



AD-0701M

櫥櫃燈 (COB)

A-D420011

功率	1.5W
電壓	AC100-240Vac
色溫	3000K/5700K
尺寸	Ø45*19mm
角度	30°
顏色	黑、白、銀



AD-0702M

櫥櫃燈

Best
超薄首選

Best
免安

L140106

功率	1.5W
電壓	AC110/220Vac 分電壓
色溫	3000K
尺寸	Ø55*13mm



AD-0703M

櫥櫃燈

A-D420201

功率	3W
電壓	AC100-240Vac
色溫	3000K/5700K
尺寸	Ø52*25mm
角度	散光
顏色	黑、白、銀




AD-0704M

櫥櫃燈

A-D420012

功率	3W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø68*23mm
角度	30°
顏色	黑、白



AD-0705M

櫥櫃燈 (COB)

A-D420009

功率	3W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø68*30mm
角度	30°
顏色	黑、白



AD-0706M

櫥櫃燈 (吸頂)

Best
免安


470-27146-00

功率	1.5W
電壓	AC110/220Vac 分電壓
色溫	3000K
尺寸	Ø55*20mm



史上最薄

高質感1.5W櫥櫃燈

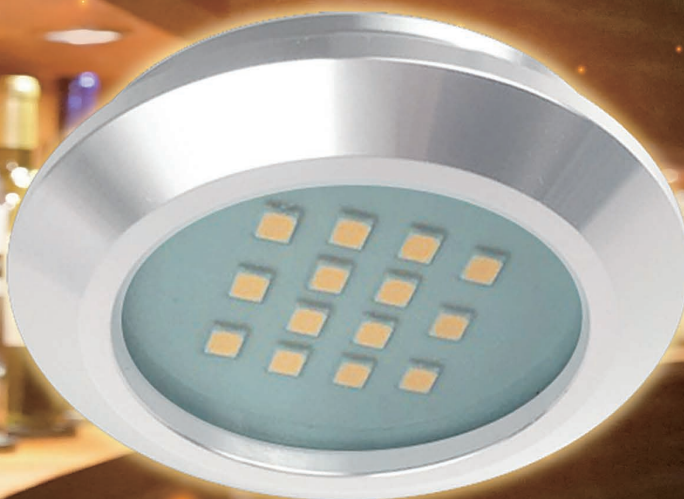

超高
亮度

防眩光
發光均勻

色彩
逼真



狹小空間、櫥櫃照明首選

無安定器、超薄型、輕量化
不受安裝空間限制

厚度僅 1cm
超輕薄





AD-0901M

一體成型嵌燈

D420010

功率	5 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø110*45mm
角度	25°



AD-0903M

一體成型嵌燈

B-D420042

功率	7 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø105*45mm
角度	25°
外觀	黑、白
透鏡	霧面、透明



AD-0904M

一體成型嵌燈

D420003

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø105*55mm
角度	25°



AD-0905M

一體成型嵌燈

D420004

功率	18 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø140*45mm
角度	25°



AD-0906M

一體成型嵌燈 (COB)

A-D420051

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø85*60mm
角度	60°




AD-0907M

一體成型嵌燈 (COB)

A-D420052

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø110*75mm
角度	60°
外觀	黑、白





節能照明

結合最新綠色環保照明、體積小、超省電、
超高演色性

AD-1001M

一體成型嵌燈（壓克力發光）



A-D420060

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø118*35mm
角度	散光
材質	鋁、壓克力



AD-1002M

一體成型嵌燈

F-D420005

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø110*35mm
角度	散光
外觀	黑、白



AD-1004M

一體成型嵌燈（調光調色）

A-L420603A

功率	10W
電壓	AC100-240Vac
色溫	3000K~6000K
尺寸	Ø110*35mm
角度	散光
外觀	白





適用空間

精品店、櫥窗、餐廳、百貨公司、
住家商業、空間重點照明

節能照明

結合最新綠色環保照明、超省電、超高演色性

AD-1101M

可調嵌燈

470-07939-00

功率	7 燈
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø145*50mm
角度	25°



Ø120mm

AD-1102M

可調嵌燈

470-07939-00

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø145*50mm
角度	25°



Ø120mm

AD-1103M

可調嵌燈 (COB)

470-07939-00

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø145*75mm
角度	60°



Ø120mm

AD-1104M

可調嵌燈

470-07939-00

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø145*40mm
角度	散光



Ø120mm

適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0401M
25°、7 燈

B



AD-0402M
25°、9 燈

C



AD-0403M
25°、12 燈

D

挑高



AD-0404M
25°、18 燈

E

均勻



AD-0405M
散光、10W

F



AD-0411M
18/24/38°、10W

G

挑高



AD-0412M
18/24/38°、20W

AD-1202M

可調伸縮式嵌燈

470-17115-00

功率	18 燈
電壓	AC100-240Vac
色溫	依搭配光源
尺寸	Ø160*205mm
角度	依搭配光源
外觀	黑色



Ø150mm

AD-1203M

AR111 嵌燈

470-17831-00

功率	9 燈
電壓	AC100-240Vac
色溫	依搭配光源
尺寸	Ø180*120mm
角度	依搭配光源



Ø160mm

AD-1204M

AR111 嵌燈

470-17311-00

功率	9 燈
電壓	AC100-240Vac
色溫	依搭配光源
尺寸	Ø180*60mm
角度	依搭配光源



Ø150mm

AD-1205M

AR111 嵌燈

470-07939-00

功率	9 燈
電壓	AC100-240Vac
色溫	依搭配光源
尺寸	Ø145*46mm
角度	依搭配光源



Ø120mm

AD-1206M

AR111 嵌燈

470-07939-00

功率	12 燈
電壓	AC100-240Vac
色溫	依搭配光源
尺寸	Ø145*46mm
角度	依搭配光源



Ø120mm

AD-1207M

AR111 嵌燈

470-07939-00

功率	10W
電壓	AC100-240Vac
色溫	依搭配光源
尺寸	Ø145*39mm
角度	依搭配光源



Ø120mm

AD-1208M

AR111 嵌燈

470-07939-00

功率	18 燈
電壓	AC100-240Vac
色溫	依搭配光源
尺寸	Ø145*46mm
角度	依搭配光源



Ø120mm


適用 光源	A	B	C	D	E
					
	AD-0303M	AD-0307M	AD-0302M	AD-0304M	AD-0308M
	15°、24°、60° 6W	45° 8W	35° 8燈	15°、24°、60° 6W	24° 12燈
			免安	免安	挑高

AD-1301M

MR16 透光型嵌燈 (壓克力發光)

470-17786-00

功率	依搭配光源
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø85*65mm
角度	散光
材質	鋁、壓克力



AD-1302M

MR16 嵌燈

470-07873-00

功率	依搭配光源
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø90*70mm
角度	15°、24°、36°、60°
材質	亞白



AD-1303M

MR16 嵌燈

470-07256-30

功率	依搭配光源
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø90*70mm
角度	15°、24°、36°、60°
材質	鋼鐵製品



4000K 無 15°

AD-1304M

MR16 嵌燈

470-07874-00

功率	依搭配光源
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø85*70mm
角度	15°、24°、36°、60°
材質	鋁



E 光源不適用

AD-1305M

MR16 嵌燈

470-07875-00

功率	依搭配光源
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø90*70mm
角度	15°、24°、36°、60°
材質	鋁



AD-1306M

MR16 嵌燈

470-07876-01

功率	依搭配光源
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø87*95mm
角度	15°、24°、36°、60°
材質	鋁



B、E 光源不適用

AD-1307M

MR16 嵌燈

470-07872-01

功率	依搭配光源
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø95*90mm
角度	15°、24°、36°、60°
材質	鋁




B、E 光源不適用

適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0303M
15°、24°、60°
6W

B



AD-0307M
45°
8W

C



AD-0302M
35°
8燈

D



AD-0304M
15°、24°、60°
6W

E



AD-0308M
24°
12燈

AD-1401M

MR16 防潮嵌燈

470-07918-10

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø84*75mm
角度	15°、24°、60°
材質	鋁



AD-1402M

MR16 嵌燈

470-07916-01

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø85*85mm
角度	15°、24°、60°
材質	鋁
顏色	白色



AD-1403M

MR16 嵌燈

470-07870-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø95*75mm
角度	15°、24°、60°
材質	鋁



AD-1404M

MR16 嵌燈

470-07871-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø100*75mm
角度	15°、24°、60°
材質	鋁



B、E 光源不適用

AD-1405M

MR16 嵌燈

470-07915-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø90*70mm
角度	15°、24°、60°
材質	鋁



AD-1407M


MR16 嵌燈

470-07917-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø105*125mm
角度	15°、24°、60°
材質	鋁
顏色	黑、白



E 光源不適用

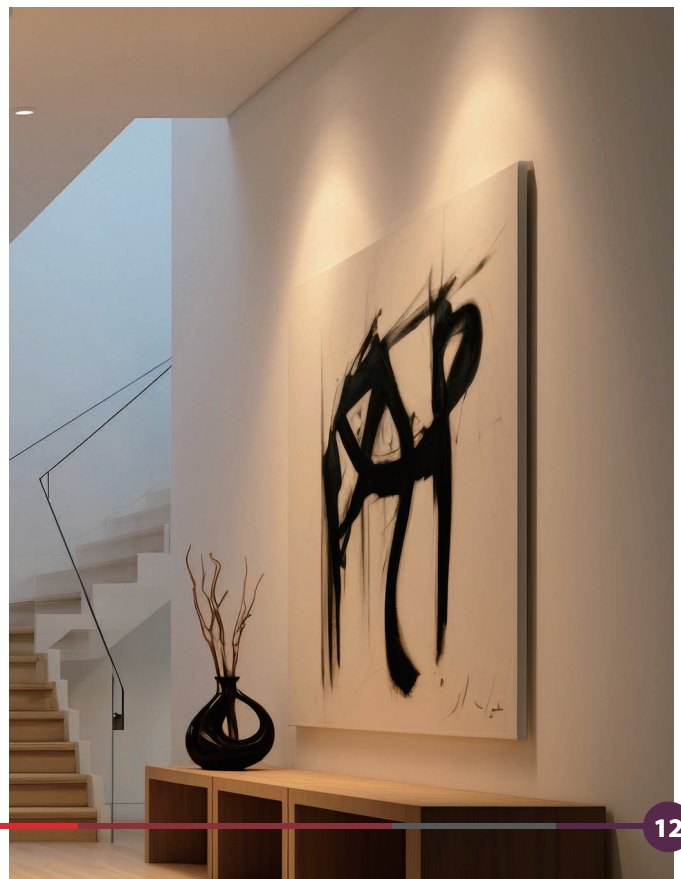



適用空間

精品店、櫥窗、餐廳、百貨公司、
住家商業、空間重點照明

節能照明

結合最新綠色環保照明、超省電、超高演色性

適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0303M
15°、24°、60°
6W

B



AD-0307M
45°
8W

C



AD-0302M
35°
8燈

D




AD-0304M
15°、24°、60°
6W

E



AD-0308M
24°
12燈



470-17793-00
防眩蜂巢網

AD-1502M

MR16 無邊框嵌燈

370-17791-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø75*70mm
角度	15°、24°、60°
材質	鋁



AD-1503M

MR16 嵌燈

370-17662-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø105*125mm
角度	15°、24°、60°
材質	鋁



AD-1605M

MR16 嵌燈

470-27047-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø90*75mm
角度	15°、24°、60°
材質	鋁





適用空間 商業空間、居家空間、辦公空間、公共空間
產品特色 均勻照明，4 種尺寸，3 種色溫




AD-1701M

LED 嵌燈

D-D030002

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø135*32mm
材質	導熱塑膠



AD-1702M

LED 嵌燈

D-D030001

功率	16W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø170*32mm
材質	導熱塑膠



AD-1705M

LED 嵌燈

A-D030003

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	Ø205*75mm
材質	鋁



AD-1706M

LED 嵌燈

A-D030004

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	Ø235*78mm
材質	鋁





AD-1801M

超薄嵌燈

A-D030201

功率	12W
電壓	AC100-240Vac
色溫	3000K/5700K
尺寸	Ø170*21mm



AD-1802M

超薄嵌燈

A-D030202

功率	18W
電壓	AC100-240Vac
色溫	3000K/5700K
尺寸	Ø210*21mm




AD-1803M

方形超薄嵌燈

A-D030107

功率	12W
電壓	AC100-240Vac
色溫	6000K
尺寸	170*170*21mm




AD-1807M

COB 嵌燈

D030403


功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	Ø190*55mm
材質	鋁

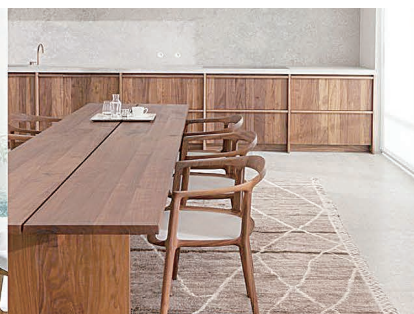

適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0303M
15°、24°、60°
6W

B



AD-0307M
45°
8W

C



AD-0302M
35°
8燈

免安

D



AD-0304M
15°、24°、60°
6W

免安

E



AD-0308M
24°
12燈

挑高

AD-1903M

MR16 軌道燈

37A-D012002

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø60*180mm
角度	15°、24°、60°
顏色	黑

B、E 光源不適用



AD-1904M

MR16 軌道燈

37A-D012002

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø60*180mm
角度	15°、24°、60°
顏色	白

B、E 光源不適用



AD-2001M

MR16 軌道燈

470-17834-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø55*185*185mm
角度	15°、24°、60°
顏色	白



AD-2002M

MR16 軌道燈

37A-D012013

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø60*170mm
角度	15°、24°、60°
顏色	黑、白

B、E 光源不適用



AD-2005M

MR16 軌道燈

37A-D012007

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø60*115*120mm
角度	15°、24°、60°
顏色	黑、白



AD-2006M

MR16 軌道燈

37A-D012016

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø60*115*120mm
角度	15°、24°、60°
顏色	黑、白

E 光源不適用




AD-2008M

MR16 軌道燈

470-27051-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø75*130*mm
角度	15°、24°、60°
顏色	黑



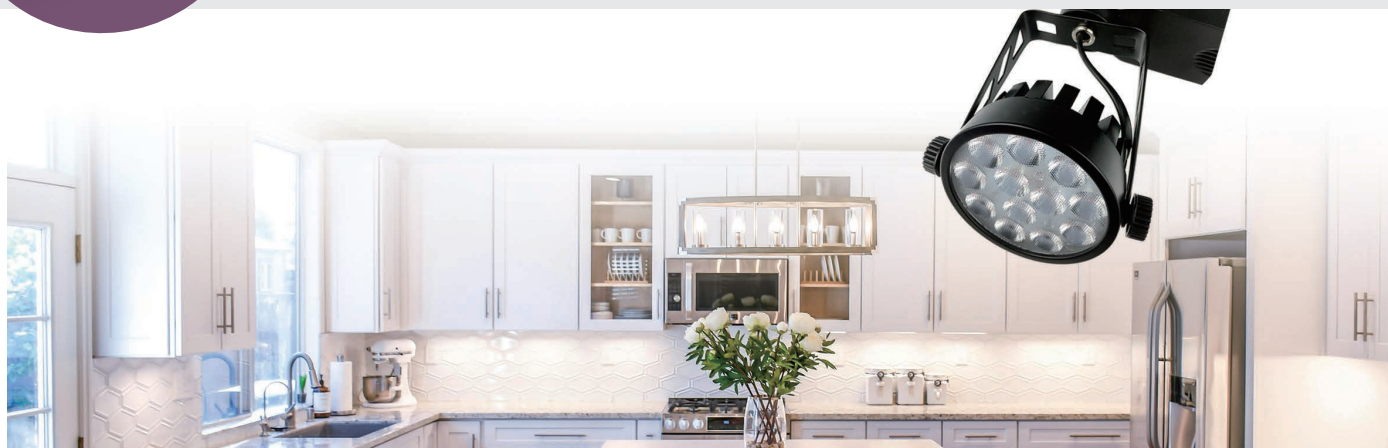

AD-2103M

軌道燈

E111006

功率	7 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø75*200mm
角度	25°
顏色	白



AD-2104M

軌道燈

E111006

功率	7 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø75*200mm
角度	25°
顏色	黑



AD-2105M

軌道燈

E111007

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø75*200mm
角度	25°
顏色	黑、白



AD-2106M

軌道燈

L200721

功率	10W
電壓	AC100-240Vac
色溫	3000K/5700K
尺寸	Ø75*200mm
角度	60°
顏色	黑、白



AD-2201M

軌道燈

L200570/D450001

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	Ø80*130*130mm
角度	散光
顏色	黑、白



AD-2203M

軌道燈

L200725

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	Ø85*135*160mm
角度	25°
顏色	黑、白



AD-2204M

軌道燈

L200726

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	85*170*160mm
角度	25°
顏色	黑、白




AD-2208M

軌道燈（壓克力透光）

47A-E111009A

功率	12W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	35*108*215mm
角度	30°
顏色	黑



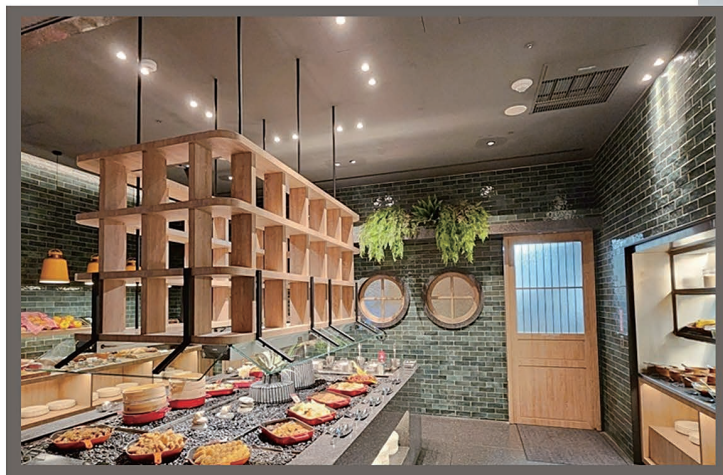

AD-2301M

軌道燈

L200718

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	98*160*190mm
角度	45°
顏色	黑



AD-2302M

軌道燈

L200718

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	98*160*190mm
角度	45°
顏色	黑



AD-2304M

軌道燈

L200705

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	105*167*220mm
角度	40°
顏色	白



AD-2305M

軌道燈

L200704

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	320*133*180mm
角度	40°
顏色	黑



AD-2306M

軌道燈

A-E111003

功率	40W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	125*170mm
角度	40°
顏色	黑



適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0401M
25°、7 燈

B



AD-0402M
25°、9 燈

C



AD-0403M
25°、12 燈

D

挑高



AD-0404M
25°、18 燈

E

均勻



AD-0405M
散光、10W

F



AD-0411M
18/24/38°、10W
CRI 90+

G



AD-0412M
18/24/38°、20W
CRI 90+

AD-2401M

AR111 軌道燈

A-D130065

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø115*175mm
顏色	黑、白



AD-2402M

AR111 軌道燈

A-D130062

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø115*210mm
顏色	黑、白



AD-2403M

AR111 軌道燈

A-D130068

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø120*180mm
顏色	黑、白



AR70

適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能



AD-0305M
30°
7W

AD-2502M

AR70 合燈

470-07903-00

功率	7W
電壓	AC100-240Vac
色溫	3000K/6000K
尺寸	108*108*70mm

109*109mm



一體成型

適用光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0901M 光源
3000K/4000K/6500K
25°、5 燈

B



AD-0903M 光源
3000K/4000K/6500K
25°、7 燈

C



AD-0904M 光源
3000K/4000K/6500K
25°、9 燈

D



AD-1002M 光源
3000K/4000K/5700K
散光

E



AD-0907M 光源
3000K/4000K/5700K
60°、10W



AD-2602M

一體成型 合燈

470-07903-00

功率	7 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	108*108*70mm
	109*109mm



AD-2603M

一體成型 合燈

470-07904-00

功率	7 燈 X2
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	210*108*70mm
	211*109mm




AD-2604M

一體成型 合燈

470-07905-00

功率	7 燈 X3
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	315*108*70mm
	316*109mm



AD-2504M

AR70 合燈

470-07904-00

功率	7WX2
電壓	AC100-240Vac
色溫	3000K/6000K
尺寸	210*108*70mm
	211*109mm




AD-2506M

AR70 合燈

470-07905-00

功率	7WX3
電壓	AC100-240Vac
色溫	3000K/6000K
尺寸	315*108*70mm
	316*109mm



MR16

適用 光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0303M
15°、24°、60°
6W

C



AD-0302M
35°
8燈

免安

D



AD-0304M
15°、24°、60°
6W

免安



適用空間 精品店、櫥窗、餐廳、百貨公司、住家商業、空間重點照明
節能照明 結合最新綠色環保照明、超省電、超高演色性

AD-2701M

MR16 嵌燈

470-17784-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	92*92*70mm
75*75mm	




AD-2703M

MR16 嵌燈

470-17785-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	95*95*108mm
96*96mm	



AD-2702M

MR16 嵌燈

470-17784-10

功率	6WX2
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	175*92*70mm
160*75mm	



AD-2704M

MR16 嵌燈

470-17785-10

功率	6WX2
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	203*95*108mm
204*96mm	



MR16

適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0303M
15°、24°、60°
6W

C



AD-0302M
35°
8燈

D



AD-0304M
15°、24°、60°
6W

免安

免安

AD-2801M

MR16 合燈

470-07882-00

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	96*96*83mm
	97*97mm



AD-2805M

MR16 合燈

470-07878-10

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	117*117*80mm
	95*95mm



AD-2802M

MR16 合燈

470-07883-00

功率	6WX2
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	204*96*83mm
	205*97mm



AD-2806M

MR16 合燈

470-07879-00

功率	6WX2
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	215*117*80mm
	190*95mm



AD-2803M

MR16 合燈

470-07884-00

功率	6WX3
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	310*96*83mm
	311*97mm



AD-2807M

MR16 合燈

470-07880-00

功率	6WX3
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	300*117*80mm
	275*95mm



AD-2804M

MR16 合燈

470-07885-00

功率	6WX4
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	205*205*83mm
	206*206mm



AD-2808M

MR16 合燈

470-07881-00

功率	6WX4
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	229*229*73mm
	199*199mm



AR111

AD-2901M

AR111 合燈

470-07925-00

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	150*150*85mm
	151*151mm



AD-2902M

AR111 合燈

470-07926-00

功率	9 燈 X2
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	150*335*85mm
	151*336mm



AD-2903M

AR111 合燈

470-07927-00

功率	9 燈 X3
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	150*465*85mm
	151*466mm



AD-2904M

AR111 合燈

470-07928-00

功率	9 燈 X4
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	300*300*85mm
	301*301mm



適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0401M
25°、7 燈

B



AD-0402M
25°、9 燈

C



AD-0403M
25°、12 燈

D

挑高



AD-0404M
25°、18 燈

E

均勻



AD-0405M
散光、10W

F



AD-0411M
18/24/38°、10W

G

挑高



AD-0412M
18/24/38°、20W



AD-3001M

AR111 合燈

470-07921-00

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	192*192*85mm

160*160mm



AD-3002M

AR111 合燈

470-07922-00

功率	9 燈 X2
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	342*192*85mm

310*160mm



AD-3003M

AR111 合燈

470-07923-00

功率	9 燈 X3
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	490*192*85mm

460*160mm



AD-3004M

AR111 合燈

470-07924-00

功率	9 燈 X4
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	356*356*85mm

324*324mm



AD-3101M

吸頂燈

470-17101-00

功率	16W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø185*90mm
顏色	白




AD-3104M

吸頂燈

470-17101-10

功率	16W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø185*90mm
顏色	黑



AD-3102M

吸頂燈

470-17102-00

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø210*140mm
顏色	白



AD-3105M

吸頂燈

470-17102-10

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø210*140mm
顏色	黑



AD-3103M

吸頂燈

470-17103-00

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø240*215mm
顏色	白




AD-3106M

吸頂燈

470-17103-10

功率	30W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø240*215mm
顏色	黑



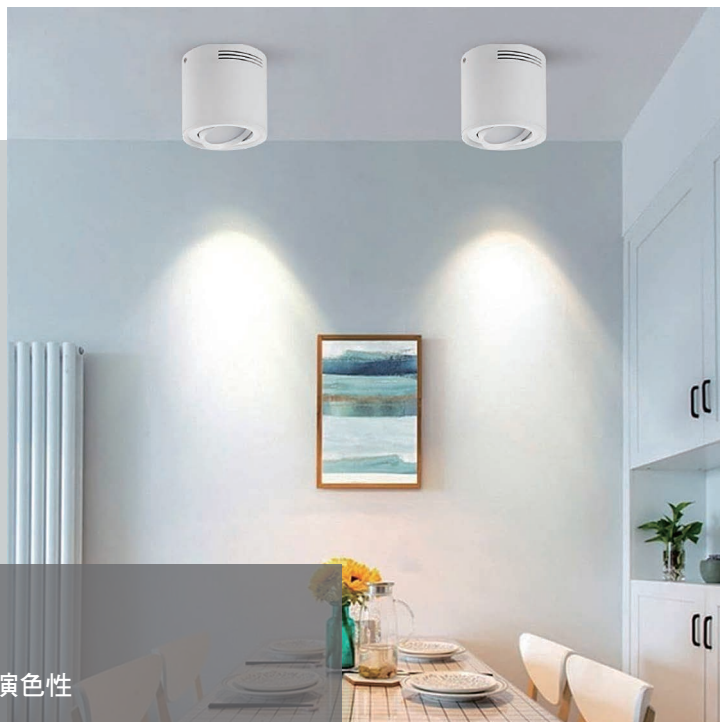

適用空間 精品店、櫥窗、餐廳、百貨公司、
住家商業、空間重點照明

節能照明 結合最新綠色環保照明、超省電、超高演色性

AD-3201M

吸頂燈

470-07919-00

功率	7 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø120*123mm
顏色	黑、白



AD-3203M

吸頂燈

470-07919-00

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø120*123mm
角度	散光
顏色	黑、白



AD-3202M

吸頂燈

470-07919-00

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø120*123mm
顏色	黑



AD-3204M

吸頂燈

470-07919-00

功率	12W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø120*123mm
角度	散光
顏色	黑、白



AD-3207M

吸頂燈

27A-L035001A-0X225

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K
尺寸	100*105mm
角度	25°
顏色	黑



可 360° 旋轉

適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

C



AD-0302M
35°
8 燈

免安

D



AD-0304M
15°、24°、60°
6W

免安

AD-3301M

吸頂燈

功率	6W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K
尺寸	Ø75*100mm
顏色	黑、白



470-07907-00/470-07907-10



適用
光源

- 任意組合適用光源
- 維修方便
- 環保節能

A



AD-0401M
25°、7 燈

B



AD-0402M
25°、9 燈

C



AD-0403M
25°、12 燈

D

挑高



AD-0404M
25°、18 燈

E

均勻



AD-0405M
散光、10W

F



AD-0411M
18/24/38°、10W

CRI 90+

G



AD-0412M
18/24/38°、20W

挑高

CRI 90+

AD-3302M

吸頂燈

470-07919-00/470-07919-10

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø120*123mm
顏色	黑、白

D 光源不適用



AD-3303M

吸頂燈

470-17311-00+470-17101-00

功率	9 燈
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø185*95mm
顏色	黑、白

D 光源不適用





適用空間 住家陽台、騎樓、浴室、樓梯間照明、住家商業
節能照明 結合最新綠色環保照明、超省電、超高演色性


AD-3401M

吸頂燈



A-D030504

功率	12W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	120*120*55mm
顏色	白
安裝	壁吸兩用



AD-3402M

吸頂燈

A-D030505

功率	18W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	180*180*55mm
顏色	白
安裝	壁吸兩用



AD-3403M

吸頂燈



A-D030501

功率	12W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	Ø120*55mm
顏色	白
安裝	壁吸兩用



AD-3404M

雙迴路/公設220V專用

吸頂燈

L250202

功率	18W
電壓	AC220Vac
色溫	3000K/4000K/6000K
尺寸	Ø180*55mm
顏色	白



AD-3405M

吸頂燈

A-D030502

功率	18W
電壓	AC100-240Vac
色溫	3000K/4000K/6000K
尺寸	Ø180*55mm
顏色	白



AD-3406M

吸頂燈

470-17825-00

燈源	球泡燈 X2
功率	12W X2
電壓	AC100-240Vac
色溫	3000K/6000K
尺寸	Ø255*85mm
顏色	白
燈座	E27





AD-3501M

T8 山型燈具 (2 呎 1 燈)

470-07248-20

功率	10W
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	638*120*85mm




AD-3502M

T8 山型燈具 (4 呎 1 燈)

470-07190-40

功率	20W
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	1253*125*85mm



AD-3503M

T8 山型燈具 (2 呎 2 燈)

470-07248-30

功率	10W X2
電壓	AC100-240Vac
光源	搭配 T8 燈管
尺寸	638*165*65mm



AD-3504M

T8 山型燈具 (4 呎 2 燈)

470-07164-01

功率	20W X2
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	1255*150*65mm



AD-3505M

T8 工事型燈具 (4 呎 1 燈)

470-07191-20

功率	20W
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	1230*125*80mm





AD-3506M

T8 工事型燈具 (4 呎 2 燈)

470-07165-01

功率	20W X2
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	1240*170*80mm



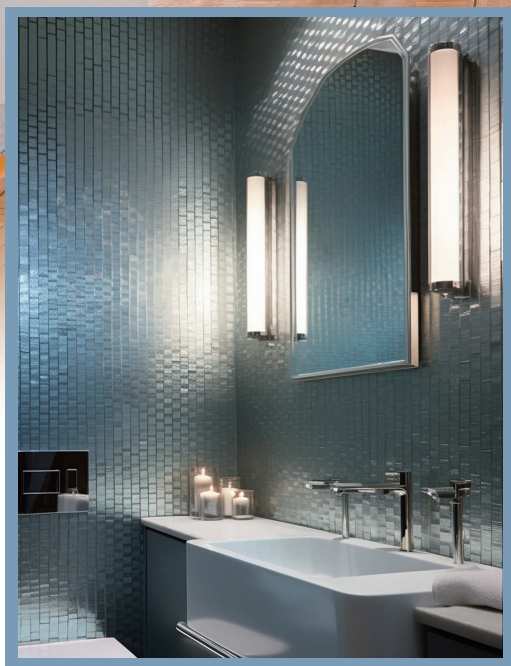

適用空間 精品店、櫥窗、餐廳、百貨公司、
住家商業、空間重點照明

節能照明 結合最新綠色環保照明、超省電、超高演色性

AD-3603M

T8 玻璃燈管 (2 呎)

E013514

功率	10W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø26*580mm




AD-3604M

T8 玻璃燈管 (4 呎)

E013515

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K/6500K
尺寸	Ø26*1198mm

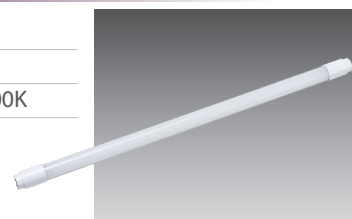



適用空間

精品店、櫥窗、餐廳、百貨公司、
住家商業、空間重點照明

節能照明

結合最新綠色環保照明、超省電、超高演色性

AD-3702M

T8 輕鋼架 (2 呎 3 燈)

470-07345-32

功率	10W X3
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	600*600*65mm




AD-3703M

T8 輕鋼架 (2 呎 4 燈)

470-07345-42

功率	10W X4
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	600*600*65mm




AD-3704M

T8 輕鋼架 (4 呎 2 燈)

470-07184-A0

功率	20W X2
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	1200*300*65mm

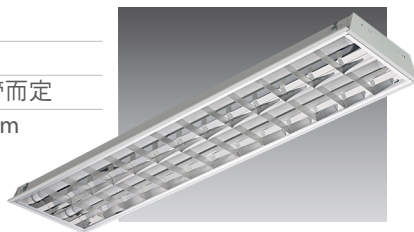

AD-3705M

T8 輕鋼架 (4 呎 3 燈)

470-07162-A0

功率	20W X3
電壓	AC100-240Vac
色溫	依搭配 T8 燈管而定
尺寸	1219*600*65mm





想變就變！ 調光調色平板燈

使用智能調色調光遙控器，不用更換線路及壁面開關，只要設定好迴路立刻裝上！

AD-3801M

直下式平板燈（調光調色）

功率	40W
電壓	AC100-240Vac
色溫	2700K~6500K
尺寸	600*600*32mm
安裝	懸吊、嵌入式



E086051



AD-3807M

直下式平板燈（調光調色）

功率	40W
電壓	AC100-240Vac
色溫	2700K~6500K
尺寸	300*1200*33mm
安裝	懸吊、嵌入式、吸頂式



E087052




AD-3808M

直下式平板燈

功率	36W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K/6500K
尺寸	600*600*32mm
安裝	嵌入式

E082052




AD-3809M

直下式平板燈

功率	36W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K/6500K
尺寸	1200*300*32mm
安裝	嵌入式

E083052




AD-3810M

直下式平板燈

功率	60W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K/6500K
尺寸	1200*600*34mm
安裝	嵌入式

E084054




AD-3811M

直下式平板燈

功率	20W
電壓	AC100-240Vac
色溫	3000K/4000K/5700K/6500K
尺寸	300*600*33mm
安裝	嵌入式

E085051





AD-4201M

壁燈

E190105

功率	4W
電壓	AC100-240Vac
色溫	2700K
尺寸	160*99*90mm
材質	鋁合金



AD-4202M

壁燈

E190106

功率	4W
電壓	AC100-240Vac
色溫	2700K
尺寸	160*99*90mm
材質	鋁合金




AD-4203M

壁燈

E190102

功率	4W
電壓	AC100-240Vac
色溫	2700K
尺寸	245*60*70mm
材質	鋁合金



AD-4204M

壁燈

E190101

功率	4W
電壓	AC100-240Vac
色溫	2700K
尺寸	102*98*100mm
材質	鋁合金



AD-4205M

壁燈

E190103

功率	4W
電壓	AC100-240Vac
色溫	2700K
尺寸	160*99*90mm
材質	鋁合金




AD-4206M

壁燈

E190101

功率	4W
電壓	AC100-240Vac
色溫	2700K
尺寸	102*98*100mm
材質	鋁合金





一致變色調光 突破壁面開關



調光調色系統

智能遙控器 - 變色調光照明

470-08549-00

電池規格：AAA/1.5V 電池 *2
可遙控距離：20 米
尺寸：146*48*20mm



應 用 產 品


P02 AD-0306M

P03 AD-0406M

P08 AD-1004M

P32 AD-3801M

P32 AD-3807M



調光

亮度無段階調整

2700K


6500K




100%




100%




50%



50%



5%



5%

調色

色溫無段階調整

6500K ~ 2700K






磁吸系列

E111030

磁吸泛光線條燈


功率	10W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L300*W22*H45
角度	120°



E111031

磁吸泛光線條燈


功率	20W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L600*W22*H45
角度	120°



E111024/E111027 (蜂巢網)

磁吸格柵燈

功率	6W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L110*W22*H45
角度	24°



E111025/E111028 (蜂巢網)

磁吸格柵燈

功率	12W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L220*W22*H45
角度	24°



E111026/E111029 (蜂巢網)

磁吸格柵燈

功率	18W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L330*W22*H45
角度	24°





随心所欲 調整色溫

僅透過撥碼即可進行
3000K/4000K/6000K
三種色溫的設定



E111032

磁吸式摺疊燈

功率	6W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L110*W22*H105
角度	24°



E111035/E111037 (蜂巢網)

磁吸式軌道燈

功率	10W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	Ø40*L100
角度	24°



E111033

磁吸式摺疊燈

功率	12W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L220*W22*H105
角度	24°



E111036/E111038 (蜂巢網)

磁吸式軌道燈

功率	15W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	Ø50*L120
角度	24°



E111034

磁吸式摺疊燈

功率	18W
色溫	3000K/4000K/6000K
顯色性	>90
尺寸	L330*W22*H105
角度	24°



磁吸一體式電源



470-08886-00 100W

輸入電壓：100~265V
輸出電壓：48V DC
輸出電流：2.1 A
尺 寸：218X22XH44mm

470-08887-00 200W

輸入電壓：100~265V
輸出電壓：48V DC
輸出電流：4A
尺 寸：317X22XH44mm

即插即用更方便

- 節省空間 · 安裝方便
- 更換容易 · 即插即用



磁吸一體式電源搭配模組



470-08877-00

磁吸輸入導電模組

尺 寸：L370mm

搭配開關電源輸入通電使用 / 智能燈具信號線



470-08888-00

直通導電模組

尺 寸：L200mm

軌與軌拼接通電使用




470-08885-00

磁吸輸入 (轉角) 導電模組

尺 寸：L320mm

轉角拼接通電使用



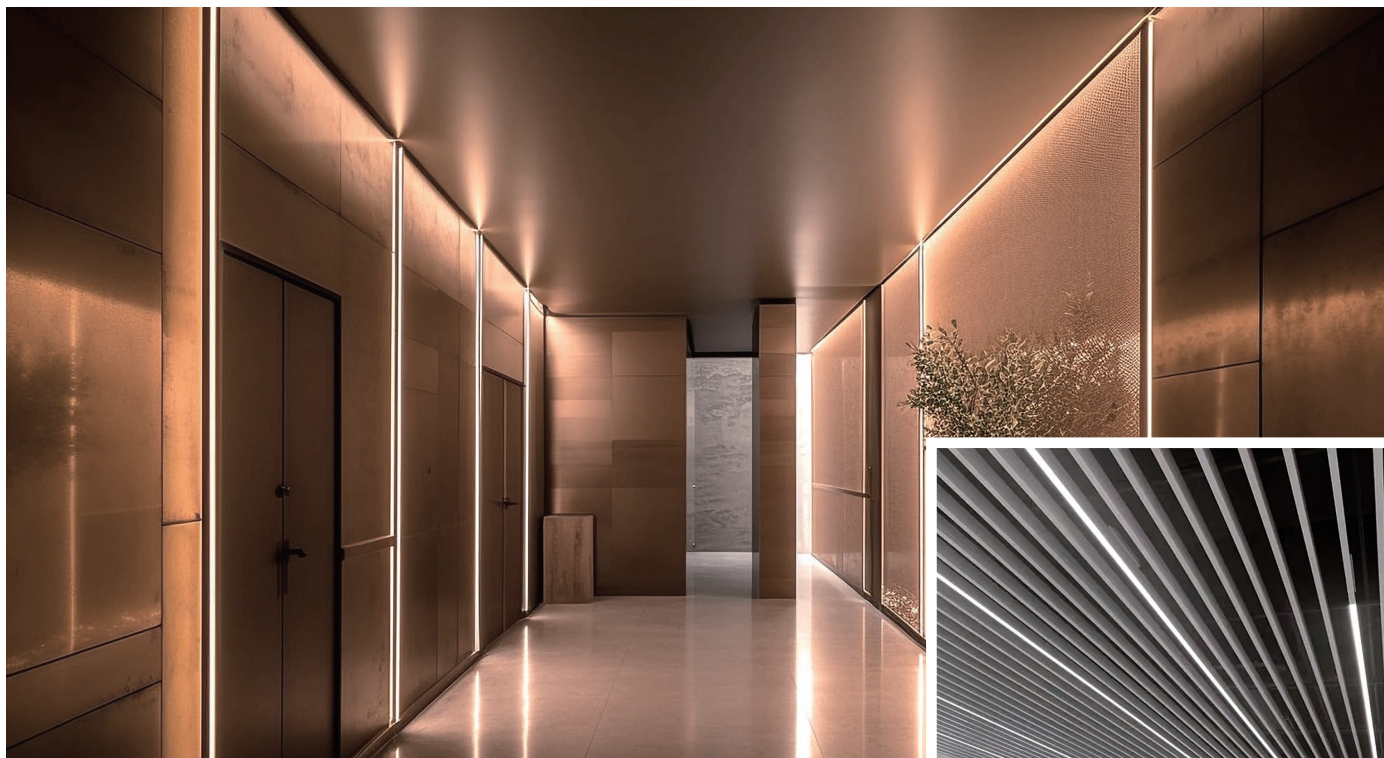

明裝軌道條



- 470-27935-00 L1000mm
- 470-27935-10 L2000mm
- 470-27935-20 L3000mm

安裝方式：吸頂 / 吊裝
開槽：無
截面：26XH51mm



鋁方通安裝示意圖

明裝軌道條 - 配件



470-27948-00 水平轉角



470-27949-00 T型轉角



470-27950-00 十字轉角



470-27951-00 軌道連接片



470-27952-00 吊線包



470-27953-00 鋁方通配件